


MM Series D.C. Brush Servomotors

Technical Data


Parameter	Unit	MM600E	MM800E	MM1000E
MOTOR				
Rated Speed	RPM	2800/96VDC	2800/96VDC	2800/96VDC
Max. Voltage	V	136	136	136
Max. Speed (20 min)	RPM	4000	4000	4000
Continuous Stall Torque TENV	Nm	2.4	3.2	4.8
Continuous Stall Current TENV	Amps	7.2	9.5	13.4
Maximum Current	Amps	38	48	72
Peak Stall Torque	Nm	12.6	16.2	25.8
Armature Resistance Less Brushes	Ohms	2.3	2.0	1.8
Max. Temperature (Limit SW.)	°C	85	85	85
Motor Weight	Kg	6.5	7.2	8.6

ENCODER

Specification	Supply Voltage	DC + 5V ± 5%
Output Phase Shift (A、 \bar{A} 、B、 \bar{B} 、Z、 \bar{Z})	A ch Output	
	B ch Output	
	C ch Output	

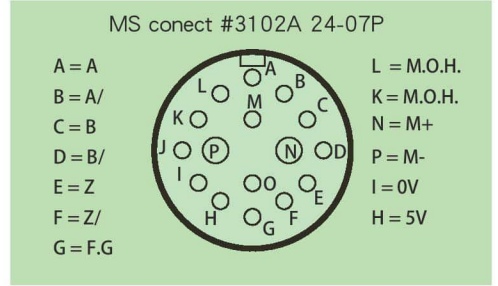

※適用驅動器 CDS-0710FVW/0715FVW/0710FVPW/0715FVPW

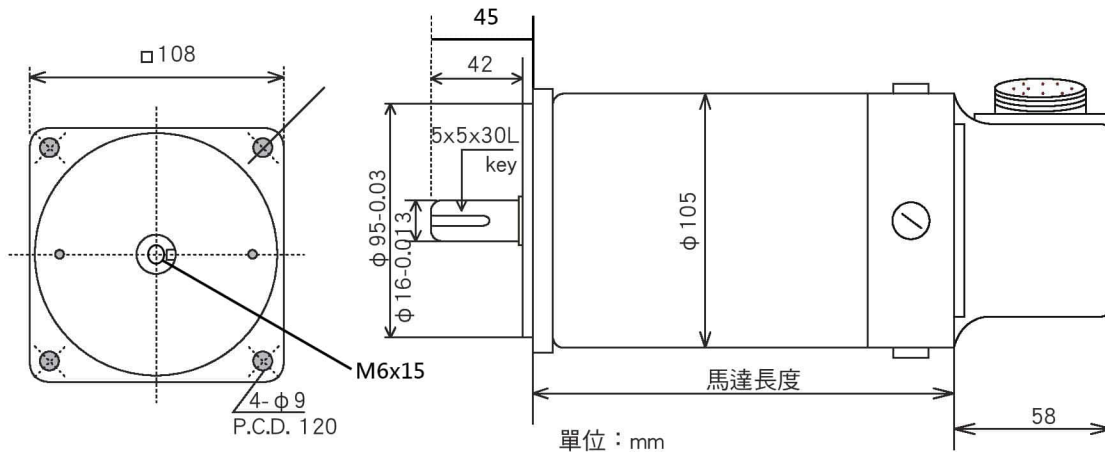

Type	馬達長度
MM600	175
MM800	190
MM1000	225

單位：mm

OPTION :

1. 加裝剎車時，馬達加長45mm(Brake Torque 3.4Nm)。
2. ENCODER 規格有500/1000/2500/5000(Linedriver)。
3. 軸心油封(TC. 17x35x7)



仕彰自動化有限公司

住 址:台灣台中市東區東福一街28號

電 話:886-4-22830909 E-mail:cds.servo@msa.hinet.net

傳 真:886-4-22830707 http://www.cds-servo.com




本公司保有修改以上規格之權利

高效率 DC 伺服馬達系統

OPTION :

Pulse Command



V Command



L195x H55x W132

600E

800E

1000E

- 高響應
- 低速高扭力
- 可取代光學尺
- 附馬達鎖固功能

因為專用

所以獨到

- AC · DC · BLDC · DD · LINEAR · VCM
- 專業伺服馬達驅動控制



- 周邊整合控制

接受訂製

CDS-FVW 伺服驅動器 信號說明

