


MM Series D.C. Brush Servomotors

Technical Data


Parameter	Unit	MM1200E	MM1200E	MM1200E
MOTOR				
Rated Speed	RPM	1600/96VDC	2000/96VDC	2800/96VDC
Max. Voltage	V			
Max. Speed (20 min)	RPM			
Continuous Stall Torque TENV	Nm	10.5	8	6.8
Continuous Stall Current TENV	Amps	18	15	19.2
Maximum Current	Amps	67	67	67
Peak Stall Torque	Nm			
Armature Resistance Less Brushes	Ohms	3.7Ω	3.7Ω	3.7Ω
Max. Temperature (Limit SW.)	°C	85	85	85
Motor Weight	Kg	13.5	13.5	13.5

ENCODER

Specification	Supply Voltage	DC + 5V±5%
Output Phase Shift (A、 \bar{A} 、B、 \bar{B} 、Z、 \bar{Z})	A ch Output	
	B ch Output	
	C ch Output	

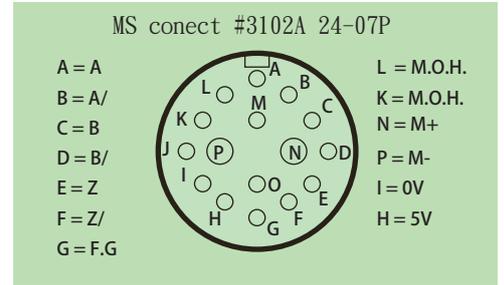

※適用驅動器 CDS-1510FVW, 0715FVPW

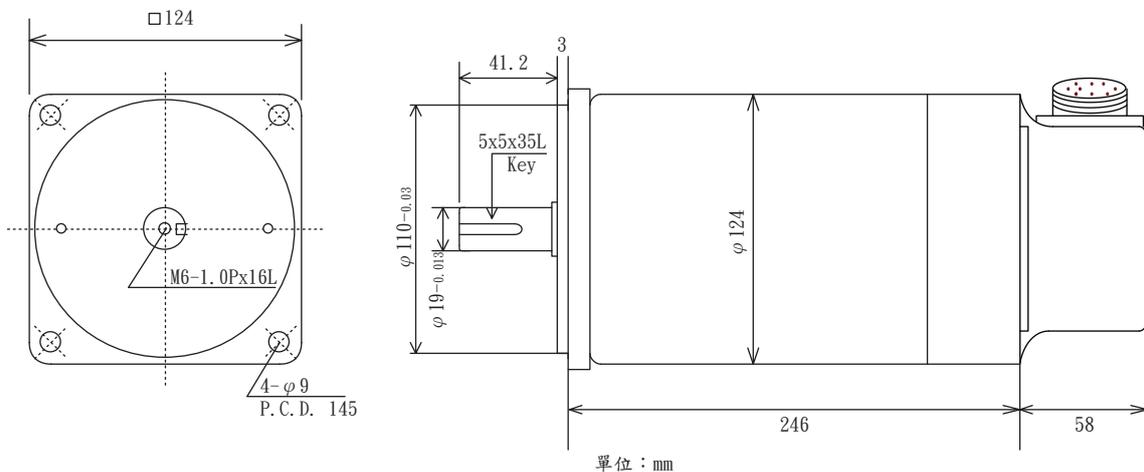

OPTION :

1. 加裝剎車時，馬達加長45mm(Brake Torque 3.4Nm)。
2. ENCODER 迴受元件組合MS接頭 MS3102A 24-7。
3. ENCODER 規格有500/1000/2500/5000(Linedriver)。
4. 軸心油封 (TC. 17x35x7)。



仕彰自動化有限公司

住 址:台灣台中市東區東福一街28號
 電 話:886-4-22830909 E-mail:cds.servo@msa.hinet.net
 傳 真:886-4-22830707 http://www.cds-servo.com




本公司保有修改以上規格之權利

高效率 DC 伺服馬達系統

OPTION :

Pulse Command

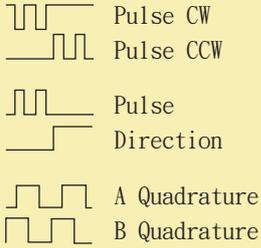

V Command



L195x H55x W132



1200E

- 高響應
- 低速高扭力
- 可取代光學尺
- 附馬達鎖固功能

因為專用

所以獨到

• AC • DC • BLDC •
DD • LINEAR • VCM
專業伺服馬達驅動控制



• 周邊整合控制

接受訂製

CDS-FVW 伺服驅動器

信號說明

