


# MM Series D.C. Brush Servomotors

## Technical Data



Parameter	Unit	MM1200T	MM1200T	MM1200T
<b>MOTOR</b>				
Rated Speed	RPM	1600/96VDC	2000/96VDC	2800/96VDC
Max. Voltage	V			
Max. Speed (20 min)	RPM			
Continuous Stall Torque TENV	Nm	10.5	8	6.8
Continuous Stall Current TENV	Amps	18	18	19.2
Maximum Current	Amps	67	67	67
Peak Stall Torque	N m			
Armature Resistance Less Brushes	Ohms	3.7Ω	3.7Ω	3.7Ω
Max. Temperature (Limit SW.)	°C	85	85	85
Motor Weight	Kg	13.5	13.5	13.5

## TACHOMETER

Voltage Gradient	Volts/1000RPM	5
------------------	---------------	---

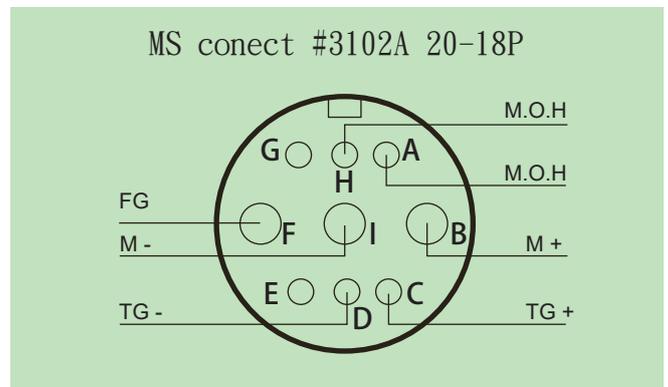

※適用驅動器 CDS-FECW系列

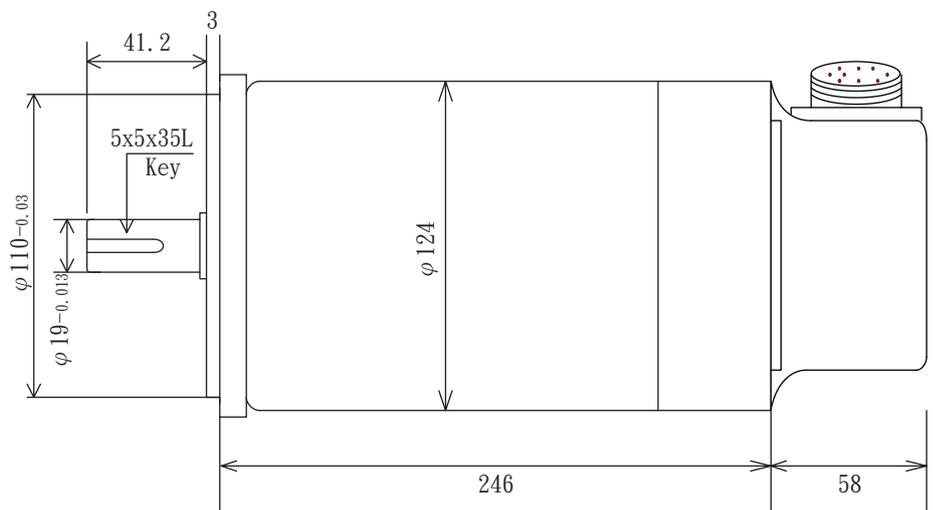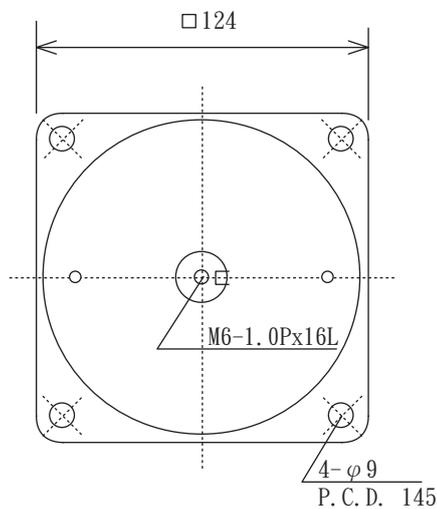

單位：mm

OPTION :

1. 加裝煞車時，馬達加長45mm( Brake Torque 3.4Nm)
2. T.G. 迴受元件組合MS接頭 MS 3102A 20-18
3. 軸心油封(TC. 20x47x7)

仕彰自動化有限公司



住 址:台灣台中市東區東福一街28號  
電 話:886-4-22830909 E-mail:cds.servo@msa.hinet.net  
傳 真:886-4-22830707 http://www.cds-servo.com




本公司保有修改以上規格之權利

# 高效率 DC 伺服馬達系統

OPTION :

## Pulse Command



V Command



L227x H58x W151



1200T

- 高響應
- 低速高扭力
- 可追加位置控制功能  
(利用外置光學尺回授)

因為專用

所以獨到

• AC • DC • BLDC •

DD • LINEAR • VCM


專業伺服馬達驅動控制



• 周邊整合控制

接受訂製

## CDS-FECW 伺服驅動器 信號說明

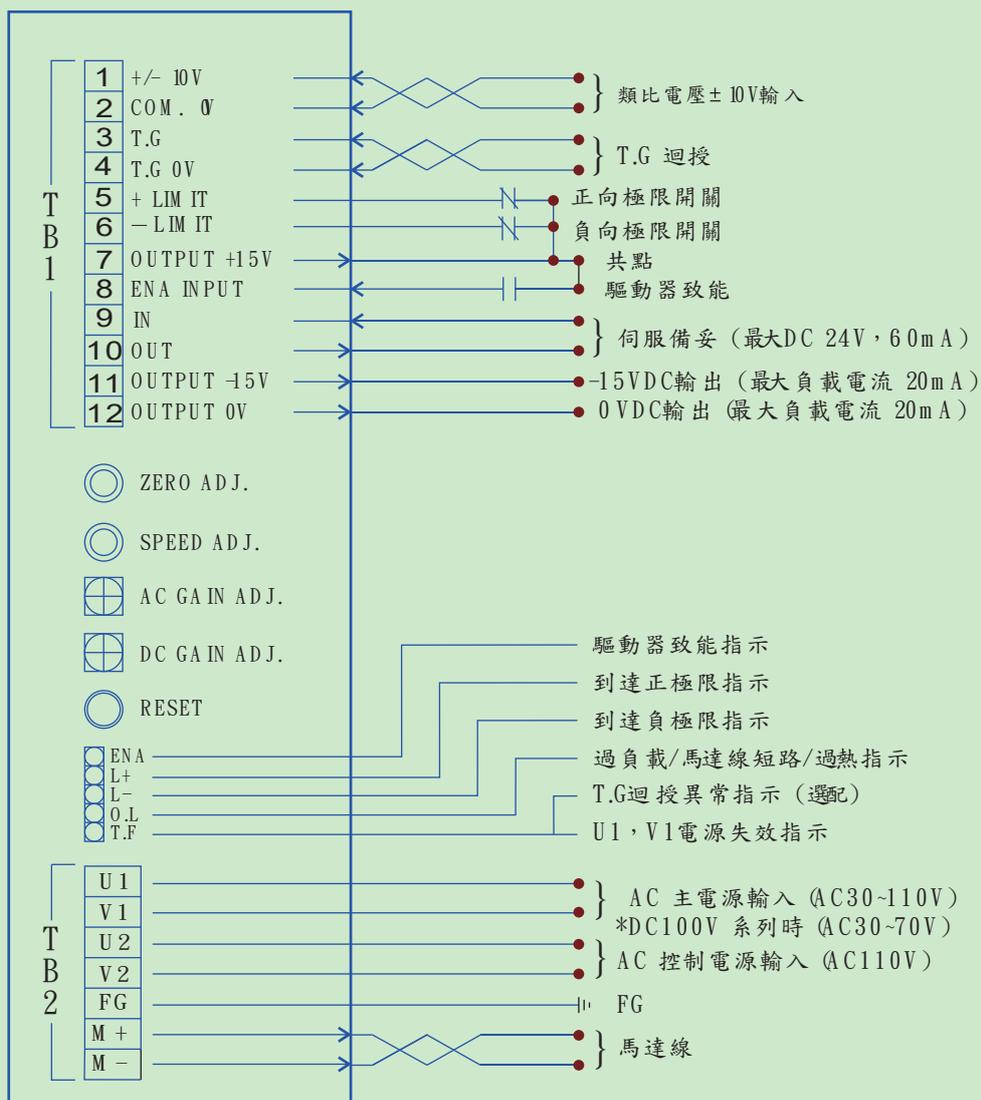

註:上圖若未經特別標示,均以DCV為信號單位。